

AFR-3

Features


- By level of professional integrated chips and control circuits
- Good looks, small size, easy to wire
- Job stability, strong anti-interference
- Power consumption, large contact
- Voltage range
- Dimensions: 58×40×50(mm)



► Technical parameters


Rated voltage	AC:110V、220V、50/60Hz	Operation voltage	5~110%
Electrode voltage	8C、24V	Resistance movement	4KΩ
Release resistance	15KΩ	Reaction time	80
Degree of contact capacity	5A、250VA	Cable length	1K
Mechanical life	5×10^6	Electrical life	10^5
Insulation resistance	100MΩ(DC500V)	Dielectric rigidity	1500VA、50/60Hz
Ambient temperature	100MΩ(DC500V)	Power consumption	3.2VA

► MODEL DESCRIPTION

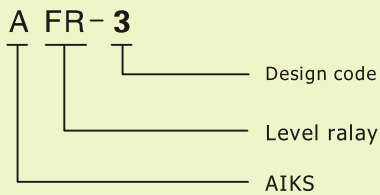


► INSTALLATION DIMENSIONS, CIRCUIT DIAGRAM Unit: mm

Installation dimensions

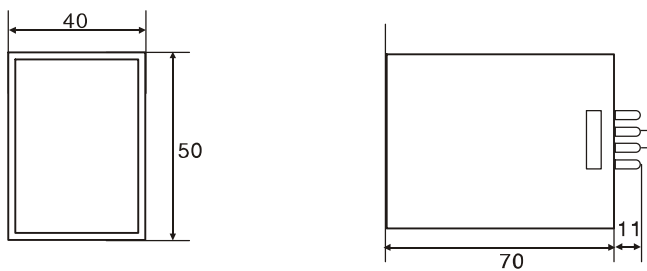


CIRCUIT diagram

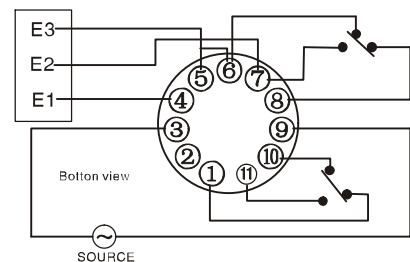

► **Wiring diagram**

(供水接线图 Water supply wiring diagram)

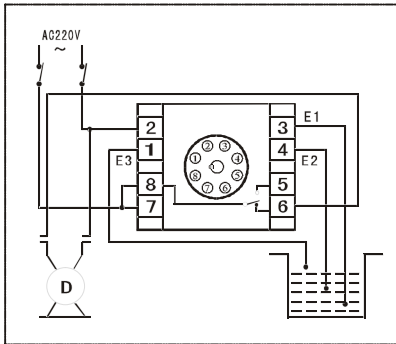

(排水接线图 Draining water wiring diagram)

