

## AFS08

### Features


- 15A switching capability for 1C
- Internal micro switch with UL
- Easy wiring with waterproof cable head
- Semi-inclusive protection
- Aluminium alloy shell



### ► Contacts parameters

Material quality	Duralumin crust	Raises cable	0.5mm <sup>2</sup> ×4Core ×2m
Built-in switch	Internal micro switch with UL	Protection grade	Ip54
Rated load	15A 220VAC	Envelop dimensions	See appearance size chart
Contact type	1a		

### ► Model interpretation

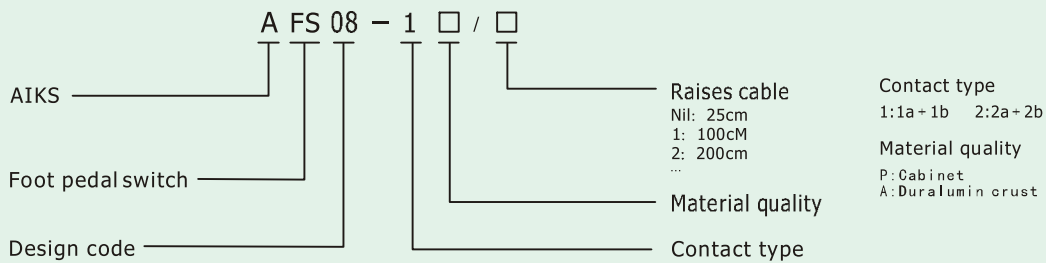

### ► OUTLINE DIMENSION WITH INSTALLATION SIZE Unit: mm

