

## ARN1 Series

### Features

- With instantaneous and self-locking test button and action instruct
- Changeover contact form groups with 2,3,4:2C, 10A , 3C 7A, 4C !
- Transparent dust cover, a variety of installation
- With a variety of outlets to choose from
- Dimensions: 28.0×21.5×40.0 (mm)




E346581

### ► Technical parameters

Contact arrangement	2C、3C、4C	
Contact material	银合金Silver Alloy (镀金)	
Contact capacity	2C 10A/28VDC 240VAC、3C 7A/28VDC 240VAC、4C 5A/28VDC 240VAC	
Contact Resistance	≤50mΩ	
Coil power	AC(VA)	1.2
	DC(W)	0.9
Coil voltage	AC(V)	6 ~ 380V
	DC(V)	6 ~ 220V
Operate time(at nomi.volt)	≤20ms	
Release time(at nomi.volt)	≤20ms	
Pull-in voltage	DC: ≤75%、AC: ≤80%	
Release Voltage	DC: ≥10%、AC: ≥30%	
Max voltage	110%	
Shock resistance	Between open contacts	1000VAC/1min (Leakage current 1mA)
	Contact group	1200VAC/1min (Leakage current 1mA)
	Coil to contacts	1500VAC/1min (Leakage current 1mA)
Insulation resistance	>500MΩ (500VDC )	
Work Life	Electrical	≥1×10 <sup>5</sup> Ops (1800 Ops/h)
	Mechanical	≥1×10 <sup>7</sup> Ops (18000 Ops/h)
Ambient temperature	-25 ~+55 °C	
Humidity	35% ~85%RH	
Atmospheric pressure	86 ~106KPa	
Impact resistance	10G (Half sine wave pulse: 11ms )	
Vibration Resistance	10 ~55Hz DA: 1.0mm	
Termination	PCB	
Construction	Dust protected	
With socket	ARS05 Series	
Unit weight	35 ~40g	


► Model Comments

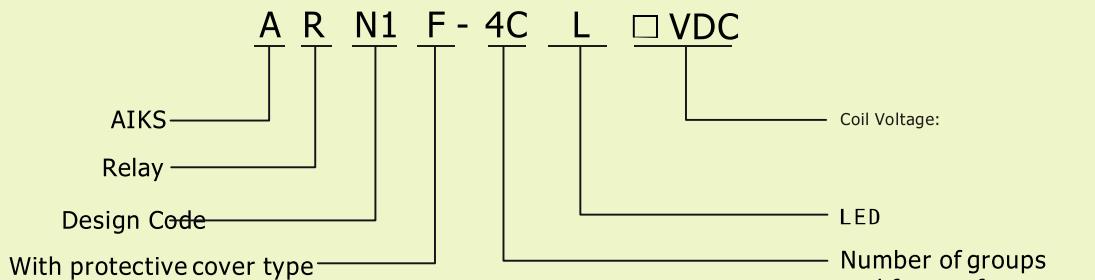


► OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

ARN1F-2C/3C

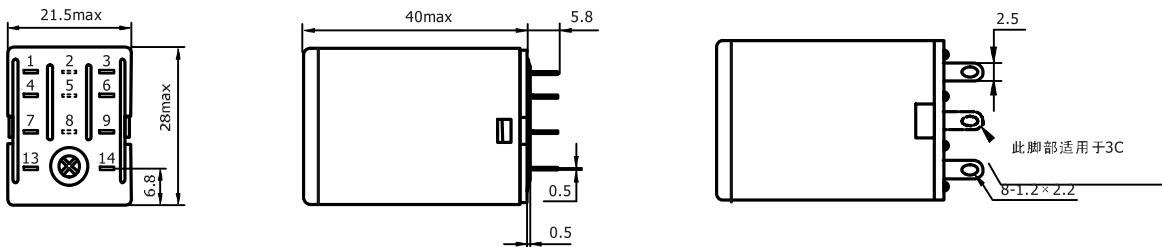


ARN1F-4C

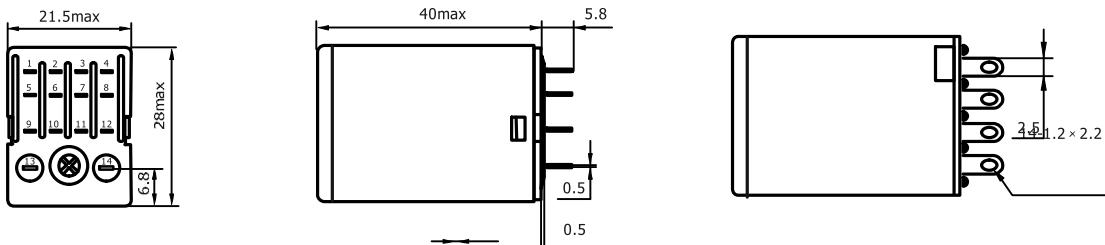

Wiring diagram


ARN1F-2C

(With light-emitting diodes)



ARN1F-3C

(With light-emitting diodes)



ARN1F-3C

(With light-emitting diodes)

