


## ARS10 Series

### ► FEATURES

- Ambient temperature : -40°C~70°C
- Rated current: 7A
- Steel retainer type:: ARS-H10A, ARS-H10B
- Module: non-available
- Wire strip length: 7mm
- Applicable relay type: ARN series
- Rated voltage: 250VAC
- Dielectric strength min.: 2000VAC(between input & output)
- Marker: non-available
- Terminal torque : 0.6Nm
- Max. wire range : 1×4/2×2.5mm<sup>2</sup>

### ► MODEL DESCRIPTION

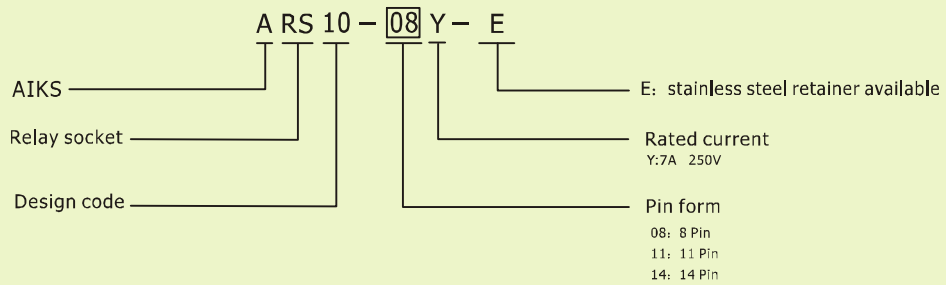

### ► OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


ARS10-08YE




Outline dimensions



Wiring diagram



ARS10-11YE




**▶ OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT Unit: mm**


ARS10-14YE





Outline dimensions





Wiring diagram


**▶ RETAINER DIMENSIONS Unit: mm**

ARS-H10A (Plastic retainer)



ARS-H10B (Steel retainer)


**▶ MARKER DIMENSIONS Unit: mm**
